


STANDARD ACCESSORIES

ALUMINUM THREADED COUPLER

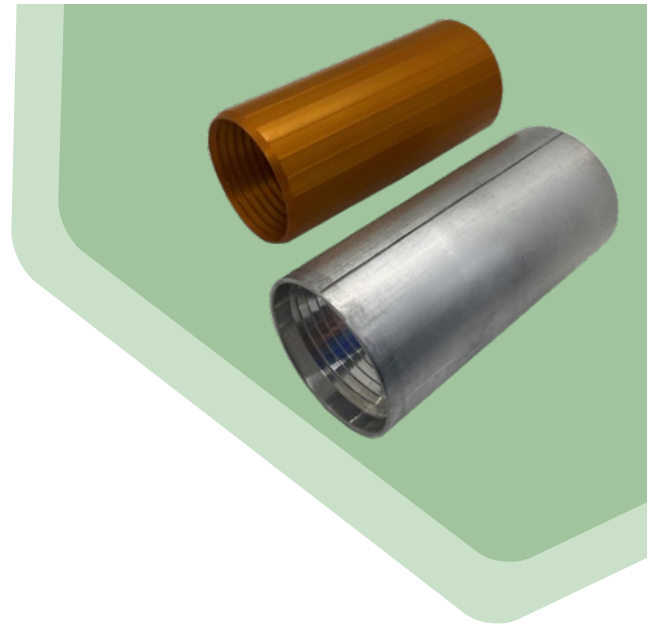

FEATURES

- Reverse-threaded aluminum coupler
- Self-threading, which draws each end of the conduit into the center of the coupler
- Wide tolerance to fit most conduits
- Easy to install
- Not airtight or watertight
- Threads may reduce conduit ID
- The Riser/Plenum versions are approved for use in both Riser and Plenum applications – Riser UL 1666 & Plenum UL 2024

ALUMINUM THREADED COUPLER

DESCRIPTION	DUCT OD WORKING RANGE	PACKAGING	SHIP WEIGHT (LBS)	PART #
1.00" Aluminum Coupler	1.160" to 1.410"	Each	0.2	20003141
1.25" Aluminum Coupler	1.495" to 1.700"	Each	0.3	20001853
1.50" Aluminum Coupler	1.800" to 1.960"	Each	0.3	20003897
2.00" Aluminum Coupler	2.310" to 2.450"	Each	0.4	20002865
2.50" Aluminum Coupler	2.835" to 2.900"	Each	0.4	20001538

RISER/PLENUM ALUMINUM THREADED COUPLER

DESCRIPTION	DUCT OD WORKING RANGE	PACKAGING	SHIP WEIGHT (LBS)	PART #
0.75" Riser/Plenum Aluminum Coupler	1.040" to 1.060"	Each	0.2	20004535
1.00" Riser/Plenum Aluminum Coupler	1.160" to 1.410"	Each	0.2	20004539
1.25" Riser/Plenum Aluminum Coupler	1.495" to 1.700"	Each	0.3	20005397
1.50" Riser/Plenum Aluminum Coupler	1.800" to 1.960"	Each	0.3	20005398
2.00" Riser/Plenum Aluminum Coupler	2.310" to 2.450"	Each	0.4	20005399



+1 800 847 7661
WWW.DURALINE.COM

