

MICROTECHNOLOGY

FUTUREPATH JUMBO 3-WAY



- FuturePath configuration consisting of three 1.25" conduit, available in your choice of True SDR 11.5 or SDR 11
- A perfect choice for customers who would like to plan for future possibilities using larger standard fiber cables for one installation cost
- No special tools or equipment needed; installation uses the same as traditional conduit or innerduct

installation types

Plow
Trench
Directional Bore



standard colors



FEATURES	STANDARD
	SEQUENTIAL FOOT OR METER MARKINGS. Custom print streams available
	RIP CORD(S) for easy opening of the sheath.
	SILICORE is co-extruded with the tough HDPE wall creating a permanent, super slippery interior lining. It has the lowest co-efficient of friction compared to other options, no performance loss in all temperature conditions and functions without additional wet lubricants.
	MATERIAL HDPE (High-density polyethylene) Smooth Outside / Smooth Inside
	FILL RATIO Choose the correct MicroDuct size based on the Outer Diameter (OD) of desired MicroCable. Dura-Line recommends a fill ratio of 50% and 75% for optimal cable placement performance. Several factors impact jetting distance, including the condition of route, bends, and equipment.
	STANDARD PACKAGING Available on standard 90" reels with up to 2500' put-ups per reel.

MICROTECHNOLOGY

FUTUREPATH 3-WAY JUMBO

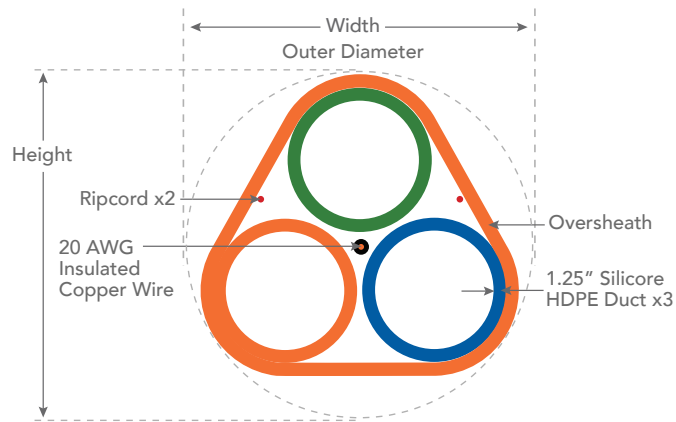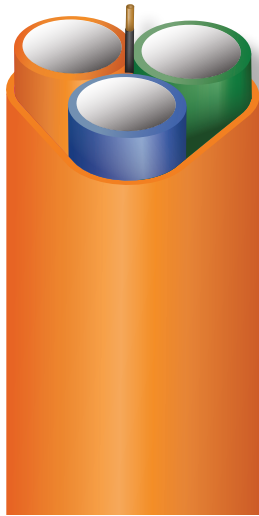

FUTUREPATH JUMBO 3-WAY TECHNICAL SPECIFICATIONS

SPECS FOR	WALL TYPE	MAX OD (IN)	WIDTH (IN)	HEIGHT (IN)	OVER-SHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP (IN)	BEND RADIUS UNSUP (IN)	SWPS† (LB)
	True SIDR 11.5	3.35	3.12	2.92	0.070/1.78	0.903	44	73	4,930
	SDR 11	3.7	3.46	3.24	0.07	0.937	55	92	6,756

*Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.
 †Safe working pull strength is calculated at 80% of tensile or breaking strength

1.25" HDPE DUCT TECHNICAL SPECIFICATIONS

SPECS FOR	WALL TYPE	OD (IN/MM)	MIN ID (IN/MM)
	1.25" True SIDR 11.5	1.488/37.8	1.23/31.1
	1.25" SDR 11	1.660/42.16	1.313/33.35



+1 800 847 7661
 WWW.DURALINE.COM

