


FUTUREPATH HYBRID 8-WAY

- ▶ FuturePath configuration mixing two popular MicroDuct sizes
- ▶ A perfect choice for customers who need to place two different micro cables at the same time, or would like to plan for future possibilities
- ▶ Multiple pathways for one installation cost, allows flexibility and future growth
- ▶ No special tools or equipment needed; installation uses the same as traditional conduit or innerduct

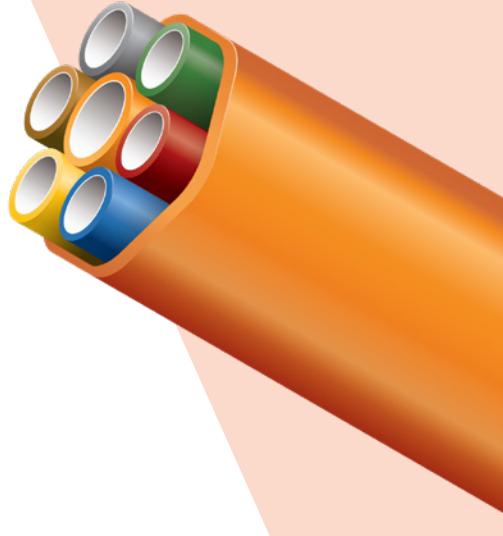

CONFIGURATIONS

16/13mm MicroDuct (x1) + 12.7/10mm MicroDuct (x7)

INSTALLATION TYPES

Plow	Directional
Trench	Bore

STANDARD COLORS



Custom colors available

STANDARD

SPECIFICATIONS/DETAILS FuturePath configuration consisting of two or more different sizes of conduit and/or MicroDucts. Manufactured from flexible HDPE (High Density Polyethylene).

FEATURES

FILL RATIO Choose the correct MicroDuct size based on the Outer Diameter (OD) of desired MicroCable. Dura-Line recommends a fill ratio of 50% to 75% for optimal cable placement performance. Several factors impact jetting distance including the condition of route, bends, and equipment.

CONDUIT MARKINGS Permanent marking along FuturePath includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.


CO-EXTRUDED LINING SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions.

INTERNAL RIBS Standard on MicroDucts

LOCATE WIRE Available with or without a 20 AWG insulated copper wire

RIP CORDS For easy opening of the oversheath

FUTUREPATH HYBRID 8-WAY TECHNICAL SPECIFICATIONS

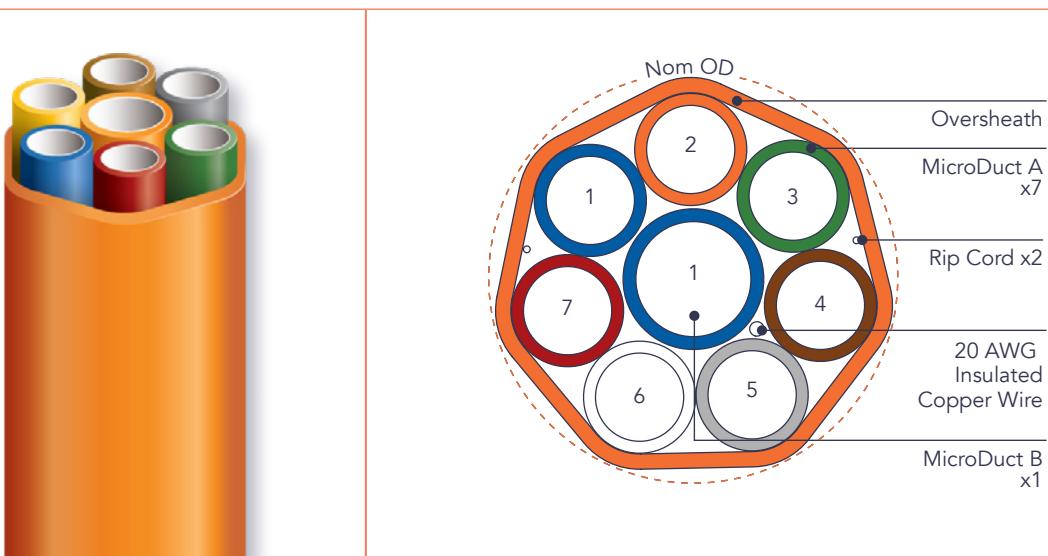


SPECS FOR	MAX OD (IN/MM)	HEIGHT (IN)	WIDTH (IN)	OVERSHEATH (IN/MM)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN/MM)	BEND RADIUS UNSUP* (IN/MM)	SWPS (LBS)†
16/13mm + 12.7/10mm	1.79	1.74	1.79	0.070	0.416	18	36	2,215

*Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

†Safe working pull strength is calculated at 80% of tensile or breaking strength

MICRODUCT A TECHNICAL SPECIFICATIONS

MICRODUCT SIZE	OD (MM/IN)	MIN ID (MM/IN)
12.7/10mm	12.7/0.50	9.8/0.39



MICRODUCT B TECHNICAL SPECIFICATIONS

MICRODUCT SIZE	OD (MM/IN)	MIN ID (MM/IN)
16/13mm	16/0.630	12.8/0.50

