


MICROTECHNOLOGY

FUTUREPATH HYBRID 15-WAY

- ▶ FuturePath configuration mixing two popular MicroDuct sizes
- ▶ A perfect choice for customers who need to place two different micro cables at the same time, or would like to plan for future possibilities
- ▶ Multiple pathways for one installation cost, allows flexibility and future growth
- ▶ No special tools or equipment needed. Installation uses the same as traditional conduit or innerduct

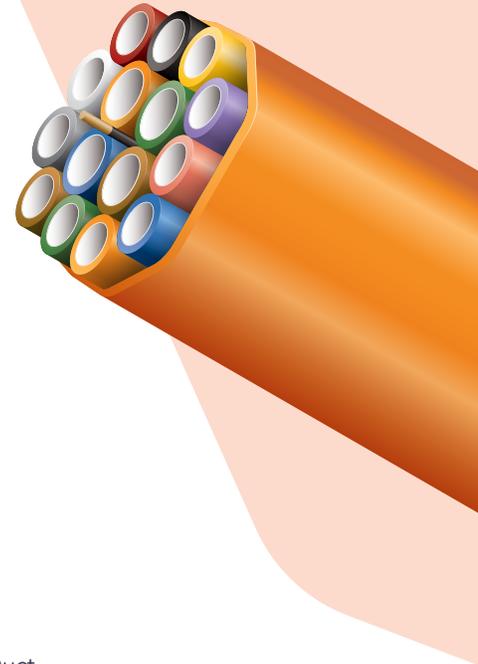

CONFIGURATIONS

16/12mm MicroDuct (4) + 14/10mm MicroDucts (11)

INSTALLATION TYPES

Plow
Trench
MicroTrench

Directional Bore
Tray

STANDARD COLORS

Oversheath

MicroDuct

Custom colors available

STANDARD

FEATURES

SPECIFICATIONS/DETAILS FuturePath configuration consisting of two or more different sizes of conduit and or MicroDucts. Manufactured from flexible HDPE (High Density Polyethylene).

FILL RATIO Choose the correct MicroDuct size based on the Outer Diameter (OD) of desired MicroCable. Dura-Line recommends a fill ratio of 50% to 75% for optimal cable placement performance. Several factors impact jetting distance including the condition of route, bends, and equipment.

CONDUIT MARKINGS Permanent marking along FuturePath includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.



CO-EXTRUDED LINING SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions.

INTERNAL RIBS Standard on MicroDucts

LOCATE WIRE Available with or without a 20 AWG insulated copper wire

RIP CORDS For easy opening of the oversheath

FUTUREPATH HYBRID 15-WAY TECHNICAL SPECIFICATIONS

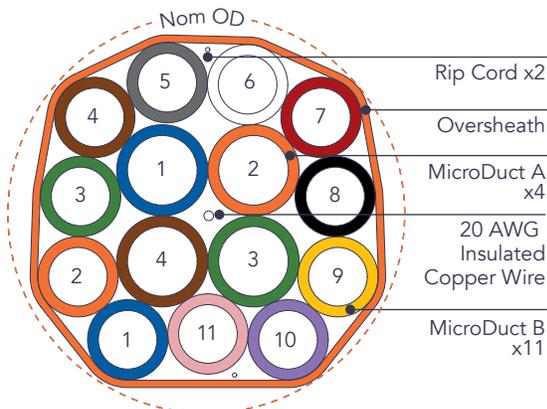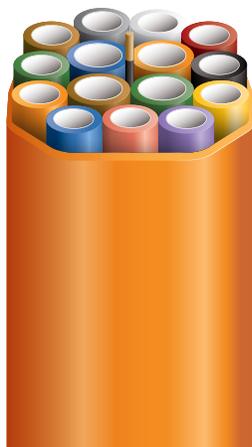


DUCT TYPES	MAX OD (IN)	HEIGHT (IN)	WIDTH (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP (IN)	BEND RADIUS UNSUP (IN)	SWPS (LB)
14/10mm + 16/12mm	2.70	2.40	2.43	0.050	0.946	36	60	5,015

† Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

MICRODUCT A TECHNICAL SPECIFICATIONS

MICRODUCT SIZE	MAX OD (MM/IN)	MIN ID (MM/IN)
16/12mm	15.9/0.63	11.6/0.46



MICRODUCT B TECHNICAL SPECIFICATIONS

MICRODUCT SIZE	MAX OD (MM/IN)	MIN ID (IN)
14/10mm	14/0.55	9.8/0.39

