
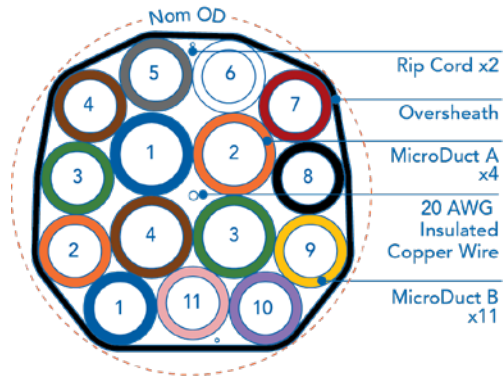


FUTUREPATH HYBRID 15-WAY TECHNICAL SPECIFICATIONS

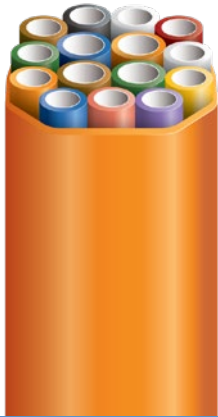


| DUCT TYPES | MAX OD (IN) | HEIGHT (IN) | WIDTH (IN) | OVERSHEATH (IN) | WEIGHT (LB/FT) | BEND RADIUS SUP (IN) | BEND RADIUS UNSUP (IN) | SWPS (LB) |
|-------------------|-------------|-------------|------------|-----------------|----------------|----------------------|------------------------|-----------|
| 14/10mm + 16/12mm | 2.70 | 2.42 | 2.42 | 0.050 | 0.946 | 36 | 61 | 5,015 |

† Safe working pull strength is calculated at 80% of tensile or breaking strength


* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

MICRODUCT A TECHNICAL SPECIFICATIONS



| MICRODUCT SIZE | MAX OD (MM/IN) | MIN ID (MM/IN) |
|----------------|----------------|----------------|
| 16/12mm | 15.9/0.63 | 11.6/0.46 |

MICRODUCT B DUCT TECHNICAL SPECIFICATIONS



| MICRODUCT SIZE | MAX OD (MM/IN) | MIN ID (IN) |
|----------------|----------------|-------------|
| 14/10mm | 14/0.55 | 9.8/0.39 |