


**MICROTECHNOLOGY**

# FUTUREPATH HYBRID 9-WAY

- ▶ FuturePath configuration mixing two popular MicroDuct sizes
- ▶ A perfect choice for customers who need to place two different micro cables at the same time, or would like to plan for future possibilities
- ▶ Multiple pathways for one installation cost, allows flexibility and future growth
- ▶ No special tools or equipment needed; installation uses the same as traditional conduit or innerduct

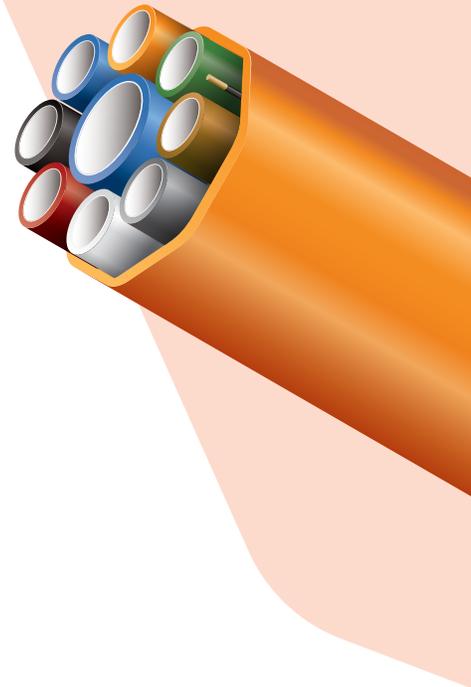

**INSTALLATION TYPES**

- Plow
- Trench
- MicroTrench
- Directional Bore
- Tray

**STANDARD COLORS**




**CONFIGURATIONS**

22/16mm MicroDuct (1) + 12.7/10mm MicroDucts (8)

FEATURES

<b>STANDARD</b>
<b>SPECIFICATIONS/DETAILS</b> FuturePath configuration consisting of two or more different sizes of conduit and or MicroDucts. Manufactured from flexible HDPE (High Density Polyethylene).
<b>FILL RATIO</b> Choose the correct MicroDuct size based on the Outer Diameter (OD) of desired MicroCable. Dura-Line recommends a fill ratio of 50% to 75% for optimal cable placement performance. Several factors impact jetting distance including the condition of route, bends, and equipment.
<b>CONDUIT MARKINGS</b> Permanent marking along FuturePath includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.
<b>CO-EXTRUDED LINING</b> SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions.
<b>INTERNAL RIBS</b> Standard on MicroDucts
<b>LOCATE WIRE</b> Available with or without a 20 AWG insulated copper wire
<b>RIP CORDS</b> For easy opening of the oversheath

## FUTUREPATH HYBRID 9-WAY TECHNICAL SPECIFICATIONS

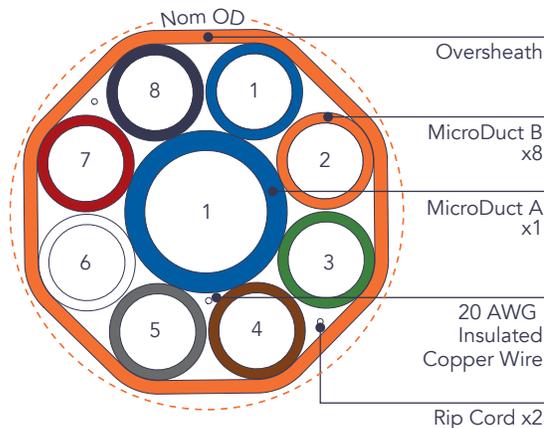


DUCT TYPES	MAX OD (IN)	HEIGHT (IN)	WIDTH (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP (IN)	BEND RADIUS UNSUP (IN)	SWPS (LB)
22/16mm + 12.7/10mm	1.98	1.98	1.98	0.070	0.528	20	40	2,811

† Safe working pull strength is calculated at 80% of tensile or breaking strength

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

### MICRODUCT A TECHNICAL SPECIFICATIONS

MICRODUCT SIZE	OD (MM/IN)	MIN ID (MM/IN)
22/16mm	22/0.87	15.4/0.61



### MICRODUCT B TECHNICAL SPECIFICATIONS

MICRODUCT SIZE	OD (MM/IN)	MIN ID (MM/IN)
12.7/10mm	12.7/0.50	9.8/0.39

