


SPECIALTY

CORRUGATED PLENUM

- Plenum rated fire retardant corrugated duct
- Flexible, lightweight and easier to install than metal conduit
- Designed to protect existing cables and facilitate future cable installation or replacement
- When tested to UL2024/UL910, FIREJACKET® & DURATHANE® are low-smoke producing and fire resistant as defined by the National Fire Protection Association when rating cables as suitable for use in ducts, plenum spaces

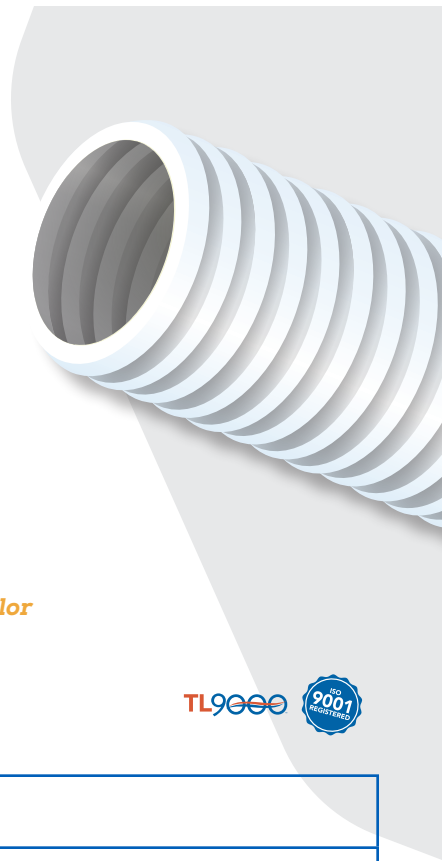

installation types

Interior Plenum Applications

size range available

1.0"
1.25"
1.5"

standard color



FEATURES

STANDARD

FOOTAGE MARKINGS Sequential foot or meter markings. Custom print streams available

PLENUM Listed to UL Standards 2024, ideally suited for plenum applications

CORRUGATED PLENUM TECHNICAL SPECIFICATIONS

SIZE	NOM OD TOL (IN)	AVG ID	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
1"	1.385±0.020	1.165	0.125	22	44	500
1.25"	1.570±0.020	1.35	0.13	22	44	500
1.5"	1.824±0.020	1.60	0.149	22	44	500

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.
† Safe working pull strength (SWPS) is calculated at 80% of tensile or breaking strength



+1 800 847 7661
WWW.DURALINE.COM

