


SPECIALTY

# UTILITY GRADE FLEX DUCT

- Utility grade PVC flexible duct
- Flexible PVC: eliminates the need for special preformed bends
- Manufactured to SCH 40 sizing specifications
- Glues to standard PVC fittings
- Temperature range: -10 F to 130 F
- Excellent cable protection from ground line to meter/service box
- Available as empty

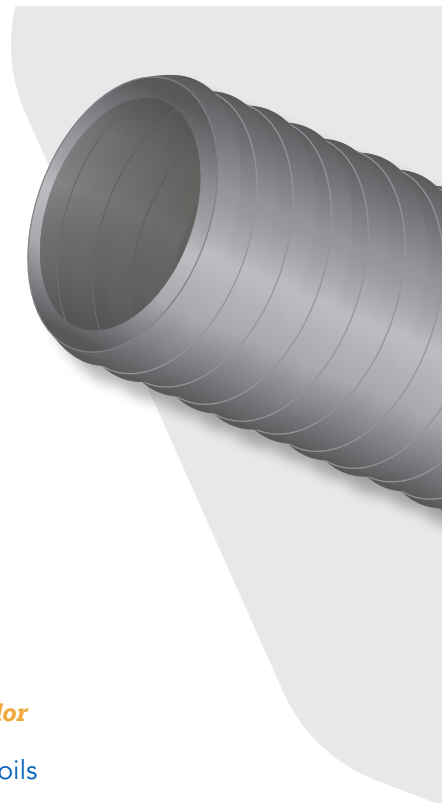

**installation types**

Cable Protection  
Below & Above Ground

**size range available**

2.5"  
3.0"  
4.0"

**standard color**

 Gray Coils



**UG FLEX DUCT ORDERING INFO**

SIZE	PART NUMBER	OD (IN)	MIN BEND RADIUS (IN)	COIL LENGTH (FT)	WEIGHT/COIL (LBS)
2 1/2"	20000414	2.89	7	50	48
3"	20000490	3.50	8	50	64
4"	20000491	4.50	11	50	97



+1 800 847 7661  
WWW.DURALINE.COM

