


STANDARD ACCESSORIES

# ALUMINUM THREADED COUPLER

FEATURES

- ▶ Reverse-threaded aluminum coupler
- ▶ Self-threading, which draws each end of the conduit into the center of the coupler
- ▶ Not air-tight or water-tight
- ▶ Threads may reduce conduit ID
- ▶ Wide tolerance 'universal' versions available for many corrugated duct sizes
- ▶ The Riser/Plenum versions are approved for use in both Riser and Plenum applications – Riser UL 1666 & Plenum UL 2024

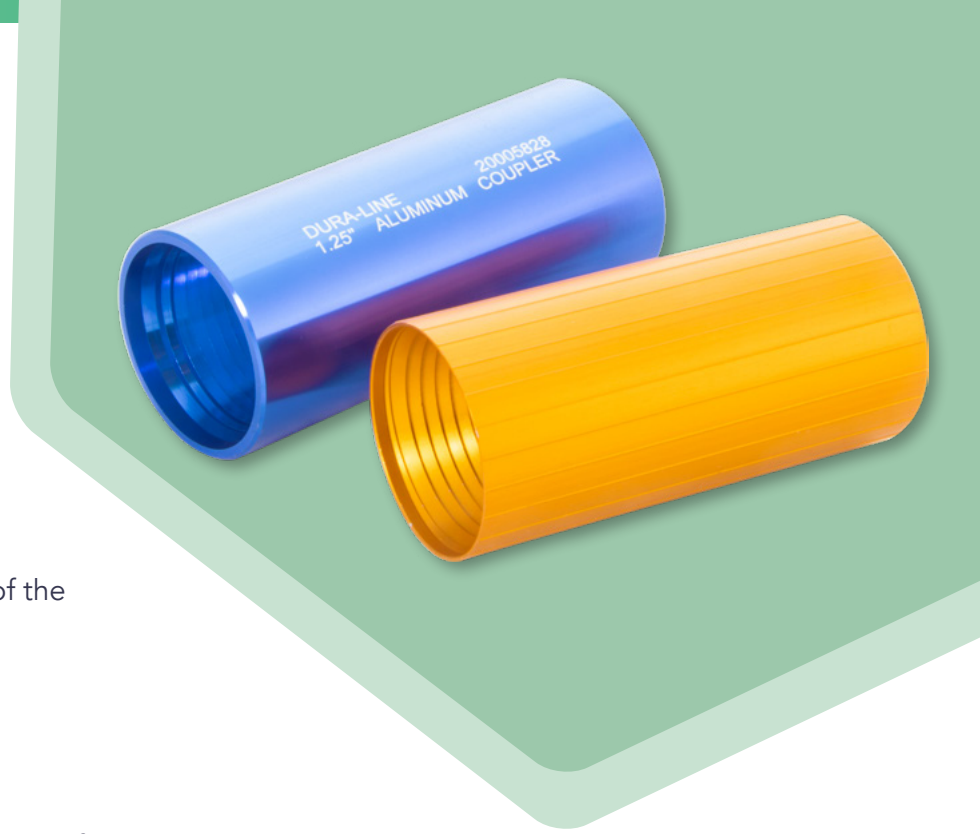



## ORDER REFERENCE

### ALUMINUM THREADED COUPLERS

DESCRIPTION	DUCT OD WORKING RANGE	PACKAGING	SHIP WEIGHT (LBS)	PART #
1" Aluminum Coupler	1.295" - 1.335"	Each	0.2	20005827
1 1/4" Aluminum Coupler	1.640" - 1.680"	Each	0.3	20005828
1 1/2" Aluminum Coupler	1.880" - 1.920"	Each	0.3	20005829
2" Aluminum Coupler	2.355" - 2.395"	Each	0.4	20005830
2 1/2" Aluminum Coupler	2.835" - 2.900"	Each	0.4	20001538

### RISER/PLENUM ALUMINUM THREADED COUPLERS

DESCRIPTION	DUCT OD WORKING RANGE	PACKAGING	SHIP WEIGHT (LBS)	PART #
3/4" Riser/Plenum Aluminum Coupler	0.996" - 1.026"	Each	0.2	20004535
1" Riser/Plenum Aluminum Coupler	1.410" - 1.440"	Each	0.2	20004539
1 1/4" Riser/Plenum Aluminum Coupler	1.620" - 1.650"	Each	0.3	20005397
1 1/2" Riser/Plenum Aluminum Coupler	1.860" - 1.890"	Each	0.3	20005398
2" Riser/Plenum Aluminum Coupler	2.465" - 2.495"	Each	0.4	20005399

### UNIVERSAL/CORRUGATED ALUMINUM THREADED COUPLERS

DESCRIPTION	DUCT OD WORKING RANGE	PACKAGING	SHIP WEIGHT (LBS)	PART #
1" Universal Aluminum Coupler	1.160" - 1.410"	Each	0.2	20003141
1 1/4" Universal Aluminum Coupler	1.495" - 1.700"	Each	0.3	20001853
1 1/2" Universal Aluminum Coupler	1.800" - 1.960"	Each	0.3	20003897
2" Universal Aluminum Coupler	2.310" - 2.450"	Each	0.4	20002865