


SPECIALTY

UL FLEX DUCT


- Non-metallic, liquid-tight flexible conduit
- UL listed for sizes 1/2" – 2" (1660, Type B)
- Sunlight (UV) resistant
- Flexible PVC: eliminates the need for special preformed bends
- Excellent cable protection from ground line to meter/service box
- Used for cable protection and above and below ground installation applications
- UL listed for use in continuous temperatures from 105 C (221 F) Dry, 60 C (140 F) Wet, or 80 C (176 F) Dry, 60 C (140 F) Wet, 70 C (158 F) oil resistant or less
- Use fittings identified for Type B conduit or use fittings for liquid-tight flexible metal conduit. FNMC-B is directly marked on non-metallic fittings that are intended for integral conduit

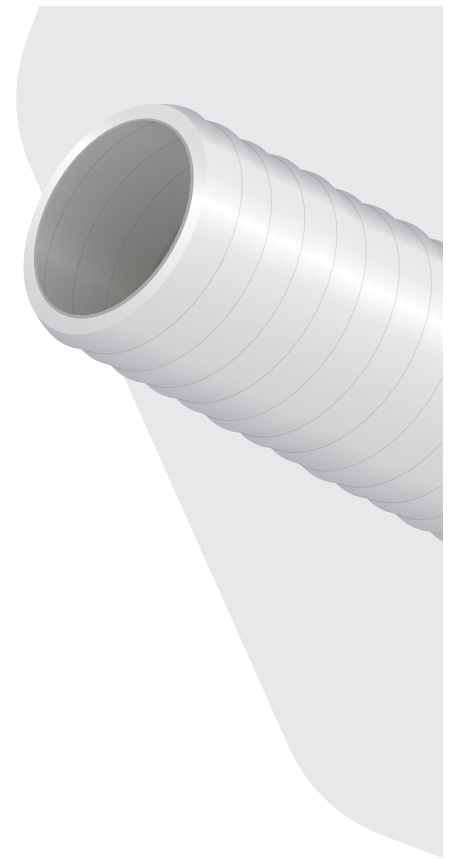

sizes available

0.5" 1.25"
0.75" 1.5"
1.0" 2.0"

standard colors

 Gray coils, empty



UL FLEX DUCT ORDERING INFO

SIZE	AVG OD (IN)	AVG ID (IN)	WEIGHT/COIL (LBS)	COIL LENGTH (FT)	PART NUMBER
1/2"	0.840	0.642	15	100	20001541
3/4"	1.050	0.840	22	100	20000409
1"	1.315	1.066	30	100	20000410
1 1/4"	1.660	1.410	20	50	20000411
1 1/2"	1.900	1.600	24	50	20000412
2"	2.375	2.045	32	50	20000413



+1 800 847 7661
WWW.DURALINE.COM

