


MICROTECHNOLOGY

MICRODUCT PIGGYBACK

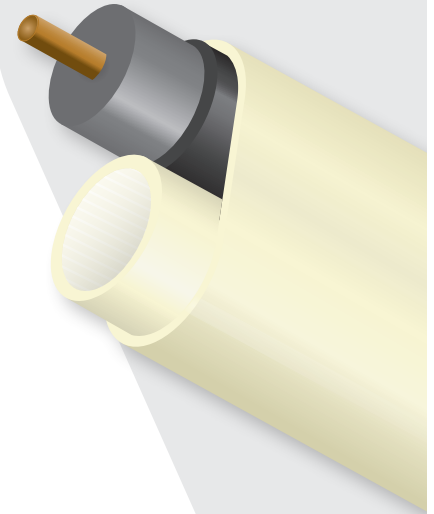

- Perfect for MDU Applications
- (1) 8.5/6 mm Microduct
- (1) RG6 Coax Cable
- Both MicroDuct and Coax Cable can be Riser rated
- Permanent Super Silicore lining to lower friction and ease drop placement
- Simple installation with both coax and fiber pathway under one sheath

INSTALLATION TYPES

Interior
Tray Installations

SIZE RANGE AVAILABLE (OD/ID)

8.5/6

STANDARD COLORS

Natural 
Custom Colors Available

FEATURES

STANDARD

MATERIAL available in HDPE or Riser

SEQUENTIAL FOOT OR METER MARKINGS Custom print streams available

SUPER SILICORE is co-extruded with the tough HDPE wall creating a permanent, super slippery interior lining. It has the lowest co-efficient of friction compared to other options, no performance loss in all temperature conditions and functions without additional wet lubricants

INTERNAL RIBS standard on most MicroDucts

OPTIONS

RIPCORD for easy opening of the sheath

PRE-INSTALLED FIBER Fiber cable or cordage can be factory preinstalled

PULL STRING Or can alternatively be supplied with a pre-installed pull string for pulling in fiber optic cable

MICRODUCT PIGGYBACK TECHNICAL SPECIFICATIONS

MICRODUCT SIZE (MM)	OVERALL HEIGHT (MM)	OVERALL WIDTH (MM)	MIN ID (MM/IN)	OVER-SHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS (LBS)
8.5/6	0.68	0.38	0.23	0.02	0.071	6	10	177



+1 800 847 7661
WWW.DURALINE.COM

