

MICROTECHNOLOGY

MICRODUCT PIGGYBACK

- Perfect for MDU Applications
- (1) 8.5/6 mm Microduct
- (1) RG6 Coax Cable
- Both MicroDuct and Coax Cable can be Riser rated
- Permanent SILICORE® ULF lining to reduce friction and ease drop placement Simple installation with both coax and fiber pathway under one sheath

INSTALLATION TYPES


Interior
Tray Installations

SIZE RANGE AVAILABLE (OD/ID)

8.5/6

STANDARD COLORS

Natural 
Custom Colors Available

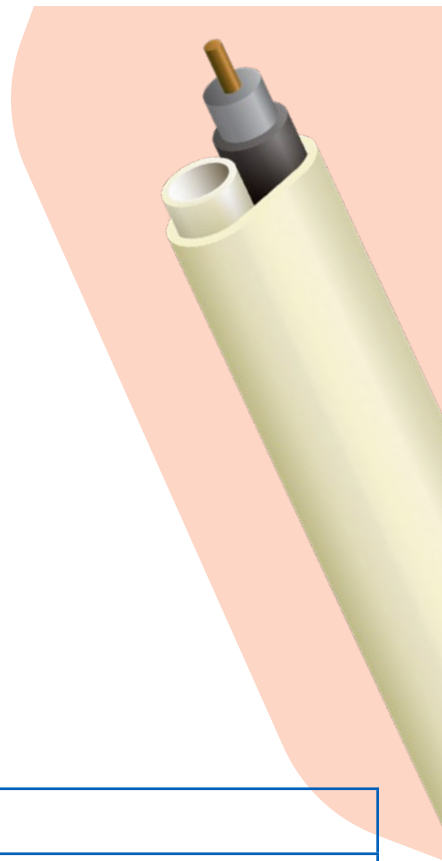

FEATURES	STANDARD
	MATERIAL available in HDPE or Riser
	SEQUENTIAL FOOT OR METER MARKINGS Custom print streams available
	SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE ULF exhibits no loss in performance over time or in extreme temperature conditions.
	INTERNAL RIBS standard on most MicroDucts
	OPTIONS
	RIPCORD for easy opening of the sheath
PULL STRING Or can alternatively be supplied with a pre-installed pull string for pulling in fiber optic cable	

MICRODUCT PIGGYBACK TECHNICAL SPECIFICATIONS

MICRODUCT SIZE (MM)	OVERALL HEIGHT (MM)	OVERALL WIDTH (MM)	MIN ID (MM/IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS (LBS)
8.5/6	0.68	0.38	0.23	0.02	0.071	6	10	177



+1 800 847 7661
WWW.DURALINE.COM

