

## MICROTECHNOLOGY

# FUTUREPATH

- Multiple pathways for one installation cost, allows flexibility and future growth
- No special tools or equipment needed; installation uses the same as traditional conduit or innerduct
- Choose the correct MicroDuct size based on the Outer Diameter (OD) of desired MicroCable. Dura-Line recommends a fill ratio of 50% to 75% for optimal cable placement performance. Several factors impact jetting distance, including the condition of route, bends, and equipment.



### INSTALLATION TYPES

Plow  
Micro-Trench  
Directional Bore

### CONFIGURATIONS

2-way	12-way
3-way	19-way
4-way	24-way
7-way	

### OVERSHEATH & MICRODUCT COLORS



custom colors available for MicroDucts and Oversheath

### FEATURES

#### STANDARD

**MATERIAL** Available in HDPE, Plenum, Riser, or LSZH and factory bundled in an oversheath

**SEQUENTIAL FOOT OR METER MARKINGS** Custom print streams available

**RIP CORD(S)** for easy opening of the sheath

**SILICORE® ULF** (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE ULF exhibits no loss in performance over time or in extreme temperature conditions

**SHIPS ON STANDARD REEL**

**INTERNAL RIBS** standard (except 3.5mm ID are designed with a standard smooth interior)



#### OPTIONS

**LOCATE WIRE** Available with or without a 20 AWG insulated copper wire

**THICKER OVERSHEATH** Available in most configurations to meet your needs for more rugged projects

# MICROTECHNOLOGY

## FUTUREPATH 2-WAY

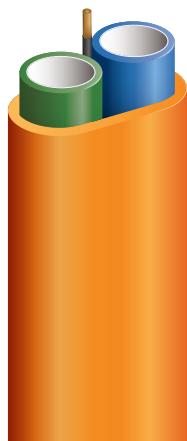

### FUTUREPATH 2-WAY TECHNICAL SPECIFICATIONS



MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
5/3.5	0.45	3.4	0.13	0.03	0.025	7	11	133
8.5/6	0.77	5.9	0.23	0.05	0.075	12	19	404
10/8	0.87	8.1	0.32	0.04	0.070	9	17	373
12.7/10	1.10	9.8	0.39	0.05	0.119	11	22	635
14/10	1.19	9.8	0.39	0.04	0.149	12	24	795
16/12	1.35	11.6	0.46	0.05	0.183	14	27	976
16/13	1.35	12.8	0.50	0.05	0.153	14	27	824
18/14	1.56	13.6	0.54	0.07	0.244	16	31	1,316
22/16	1.82	15.4	0.61	0.07	0.333	18	36	1,788
27/20	2.27	20.7	0.81	0.05	0.374	17	29	2,042

† Safe working pull strength is calculated at 80% of tensile or breaking strength

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

# MICROTECHNOLOGY

# FUTUREPATH 3-WAY

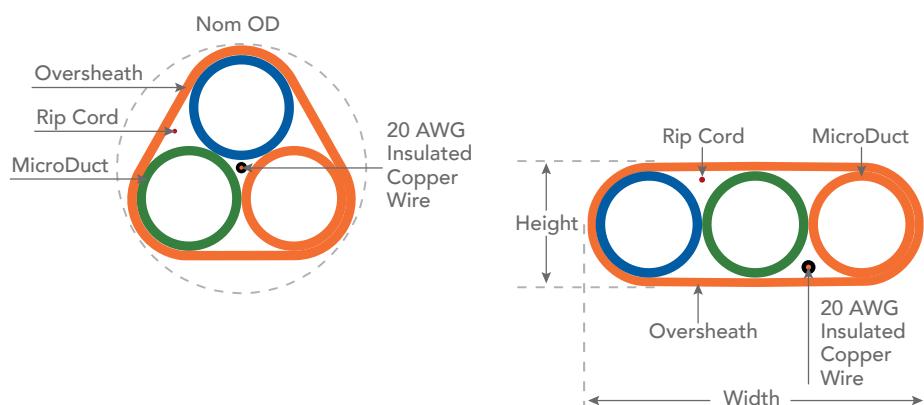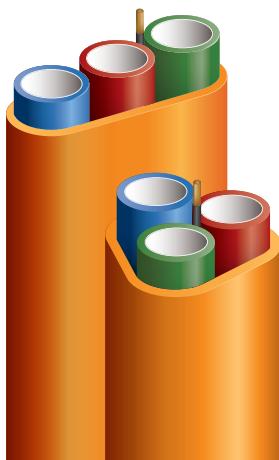



## FUTUREPATH 3-WAY TECHNICAL SPECIFICATIONS

MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
5/3.5	0.51	3.4	0.13	0.04	0.040	7	11	220
8.5/6	0.85	5.9	0.23	0.06	0.110	11	19	593
10/8	0.99	8.1	0.32	0.07	0.128	10	20	684
10/8 (FLAT)	1.29	8.1	0.32	0.05	0.116	19	32	619
12.7/10	1.14	9.8	0.39	0.07	0.191	12	24	1,021
14/10	1.17	9.8	0.39	0.04	0.193	19	31	1,026
16/12	1.49	11.6	0.46	0.07	0.292	15	30	1,559
16/12 (FLAT)	1.98	11.6	0.46	0.05	0.265	20	40	1,412
16/13	1.49	12.8	0.50	0.07	0.247	20	33	1,331
16/13 (FLAT)	1.98	12.8	0.50	0.05	0.220	20	40	1,184
18/14	1.67	13.6	0.54	0.07	0.330	22	37	1,776
18/14 (FLAT)	2.23	13.6	0.54	0.05	0.306	22	45	1,645
22/16	1.79	15.4	0.61	0.05	0.413	18	36	2,111
27/20	2.37	20.7	0.81	0.05	0.532	31	52	2,847

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.  
 † Safe working pull strength is calculated at 80% of tensile or breaking strength

MICROTECHNOLOGY

# FUTUREPATH 4-WAY

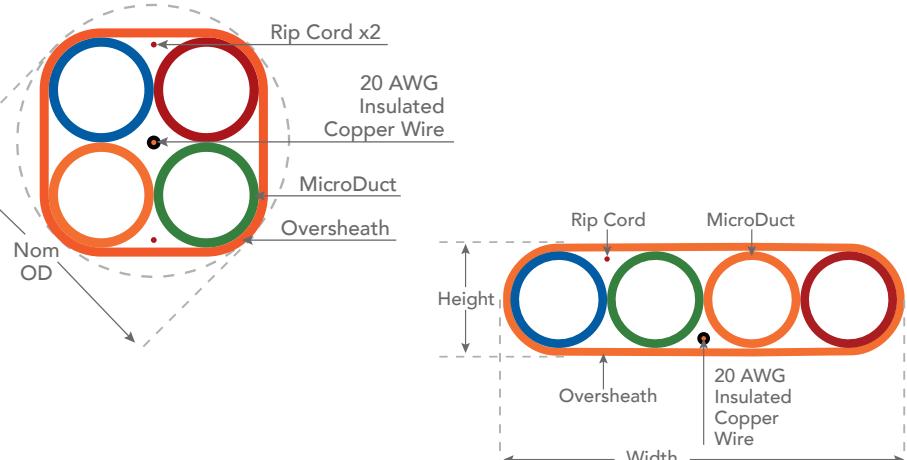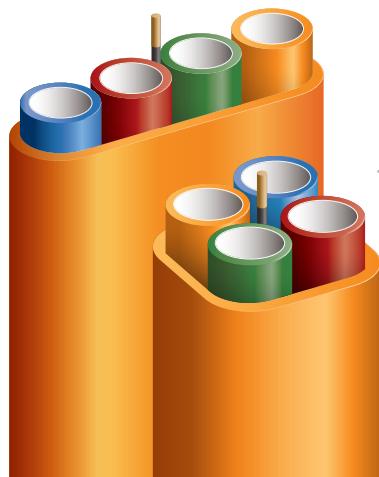

## FUTUREPATH 4-WAY TECHNICAL SPECIFICATIONS



MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
5/3.5	0.56	3.4	0.13	0.04	0.050	7	12	276
8.5/6	0.93	5.9	0.23	0.06	0.136	12	20	733
10/8	1.04	8.1	0.32	0.04	0.120	11	17	635
12.7/10	1.34	9.8	0.39	0.07	0.236	13	27	1,260
12.7/10 (FLAT)	2.14	9.8	0.39	0.05	0.223	21	42	1,189
14/10	1.47	9.8	0.39	0.07	0.320	13	25	1,709
16/12	1.66	11.6	0.46	0.07	0.368	17	33	1,963
16/13	1.65	12.8	0.50	0.07	0.308	25	41	1,658
16/13 (FLAT)	2.67	12.8	0.50	0.05	0.290	39	66	1,516
18/14	1.86	13.6	0.54	0.07	0.417	19	37	2,243
22/16	2.23	15.4	0.61	0.07	0.613	28	47	2,840
27/20	2.68	20.7	0.81	0.07	0.751	40	67	4,024

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength

# MICROTECHNOLOGY

# FUTUREPATH 7-WAY

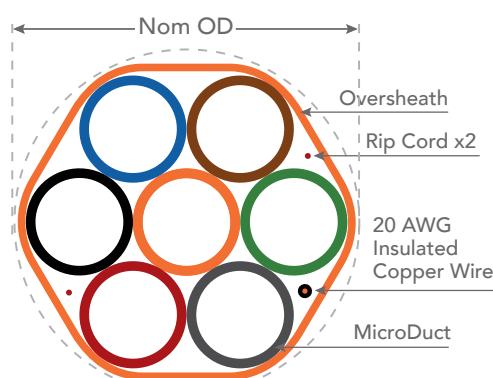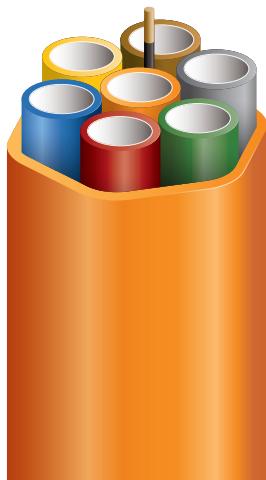

## FUTUREPATH 7-WAY TECHNICAL SPECIFICATIONS



MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
5/3.5	0.67	3.4	0.13	0.04	0.075	7	13	409
7/5.5	0.93	5.6	0.22	0.05	0.116	9	19	633
8.5/6	1.13	5.9	0.23	0.06	0.207	16	26	1,112
10/8	1.29	8.1	0.32	0.05	0.204	13	26	1,080
12.7/10	1.64	9.8	0.39	0.07	0.360	16	33	1,926
14/10	1.77	9.8	0.39	0.05	0.465	18	35	2,474
16/12	2.03	11.6	0.46	0.07	0.579	20	40	3,079
16/13	2.03	12.8	0.50	0.07	0.471	20	41	2,530
18/14	2.27	13.6	0.54	0.07	0.656	31	52	3,522
22/16	2.74	15.4	0.61	0.07	1.047	38	63	5,588
27/20	2.97	20.7	0.81	0.05	1.126	49	81	6,013

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength

MICROTECHNOLOGY

# FUTUREPATH 12-WAY

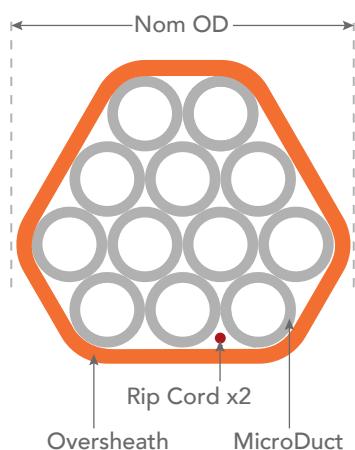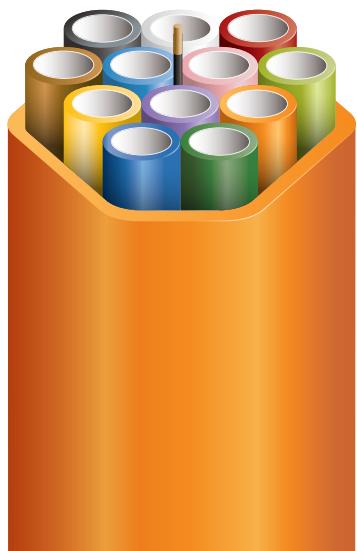

## FUTUREPATH 12-WAY TECHNICAL SPECIFICATIONS



MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
5/3.5	0.89	3.4	0.13	0.05	0.123	9	18	674
8.5/6	1.48	5.9	0.23	0.06	0.322	26	33	1,727
10/8	1.70	8.1	0.32	0.05	0.314	17	34	1,655
12.7/10	2.14	9.8	0.39	0.07	0.566	20	40	3,004

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength

MICROTECHNOLOGY

# FUTUREPATH 19-WAY

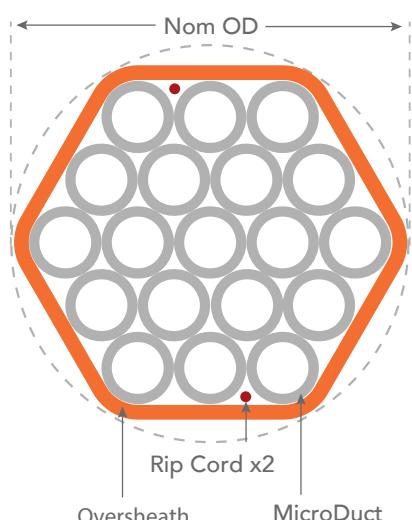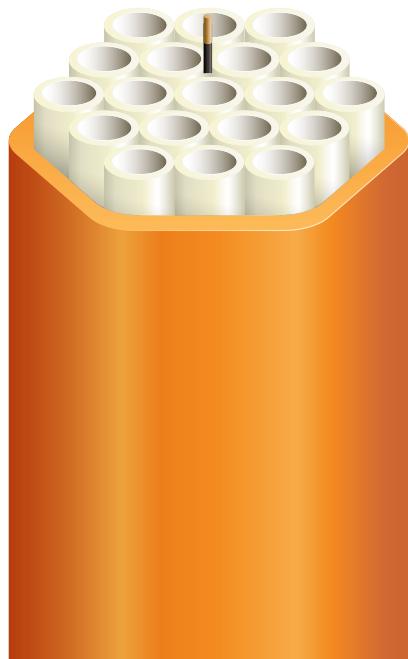

## FUTUREPATH 19-WAY TECHNICAL SPECIFICATIONS



MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPST (LBS)
5/3.5	1.07	3.4	0.13	0.04	0.168	14	24	920
8.5/6	1.80	5.9	0.23	0.06	0.472	24	41	2,528
10/8	2.09	8.1	0.32	0.06	0.489	21	42	2,577
12.7/10	2.64	9.8	0.39	0.07	0.826	24	47	4,373

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength

MICROTECHNOLOGY

# FUTUREPATH 24-WAY

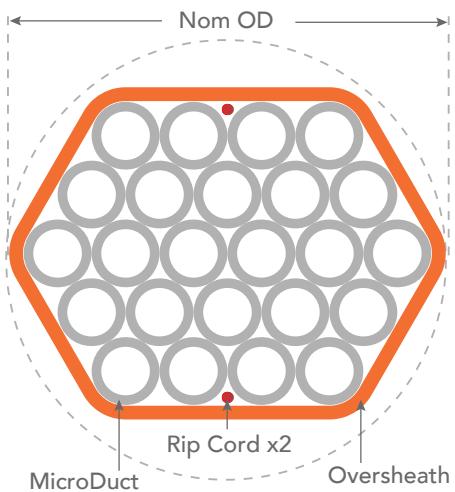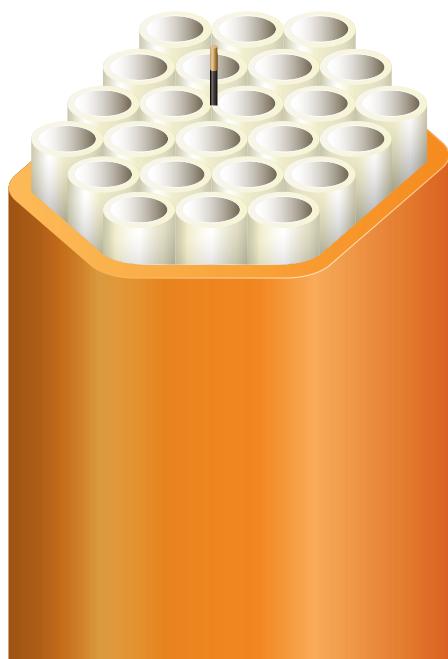

## FUTUREPATH 24-WAY TECHNICAL SPECIFICATIONS

MICRODUCT OD/ID (MM)	NOM OD (IN)	MICRODUCT MIN ID (MM)	MICRODUCT MIN ID (IN)	OVERSHEATH (IN)	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
5/3.5	1.27	3.4	0.13	0.04	0.202	14	24	1,120
8.5/6	2.13	5.9	0.23	0.06	0.579	24	41	3,099

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength