

FUTUREPATH FLEX

-

CONFIGURATIONS

2-way	6-way
4-way	8-way

MicroDuct

Custom Colors Available

INTERNAL RIBS standard on most MicroDucts. (3.5mm ID are designed with a standard smooth interior)

FEATURES




+1 800 847 7661
WWW.DURALINE.COM



orbis 
Advancing life together

MICROTECHNOLOGY

FUTUREPATH FLEX 2-WAY

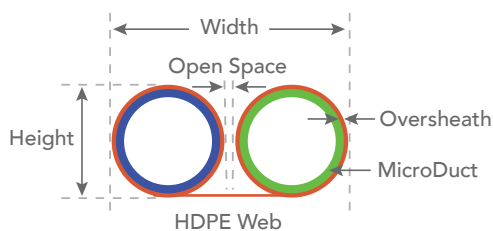

FUTUREPATH FLEX 2-WAY TECHNICAL SPECIFICATIONS

MICRODUCT OD/ID (MM)	MICRODUCT MIN ID (MM/IN)	WIDTH (IN)	HEIGHT (IN)	OVER- SHEATH (IN)	WEB THICKNESS	WEIGHT #/FT	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
12.7/10	9.8/0.39	1.27	0.118	0.035	0.02	0.118	6	11	630
18/14	13.6/0.54	1.64	0.201	0.04	0.02	0.201	12	20	1081

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength





+1 800 847 7661
WWW.DURALINE.COM



MICROTECHNOLOGY

FUTUREPATH FLEX 4-WAY

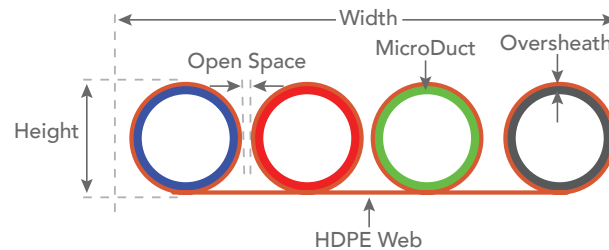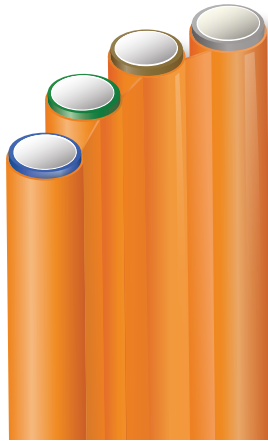

FUTUREPATH FLEX 4-WAY TECHNICAL SPECIFICATIONS

MICRODUCT SIZE (MM)	MICRODUCT MIN ID (MM/IN)	WIDTH (IN)	HEIGHT (IN)	OVER-SHEATH (IN)	WEB THICKNESS	WEIGHT (#/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
12.7/10	9.8/0.39	2.55	0.57	0.035	0.02	0.238	6	11	1271
18/14	13.6/0.54	3.65	0.78	0.04	0.02	0.411	12	20	2210

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength





+1 800 847 7661
WWW.DURALINE.COM



MICROTECHNOLOGY

FUTUREPATH FLEX 6-WAY

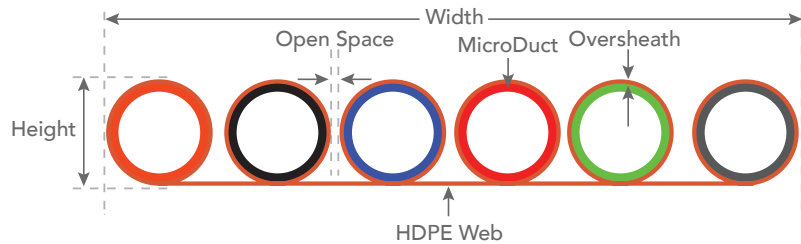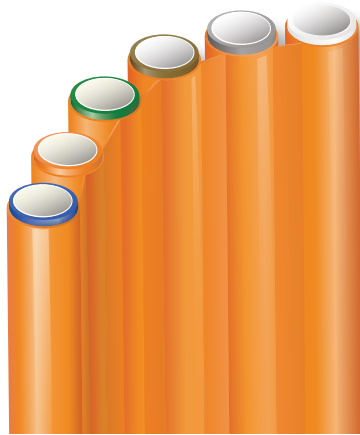

FUTUREPATH FLEX 6-WAY TECHNICAL SPECIFICATIONS

MICRODUCT SIZE (MM)	MICRODUCT MIN ID (MM/IN)	WIDTH (IN)	HEIGHT (IN)	OVER-SHEATH (IN)	WEB THICKNESS	WEIGHT (#/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
12.7/10	9.8/0.39	3.82	0.57	0.035	0.02	0.359	6	11	1917
18/14	13.6/0.54	5.37	0.78	0.04	0.02	0.618	12	20	3323

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength





+1 800 847 7661
WWW.DURALINE.COM



MICROTECHNOLOGY

FUTUREPATH FLEX 8-WAY

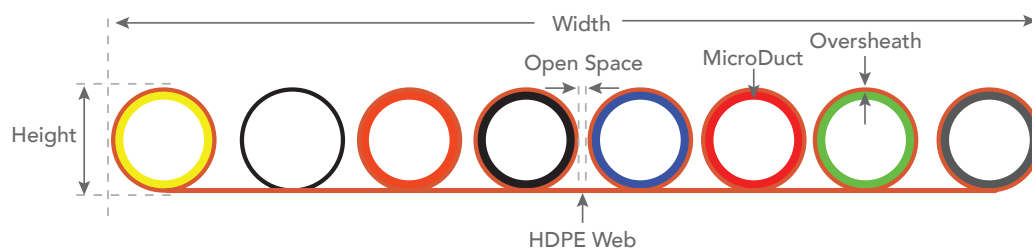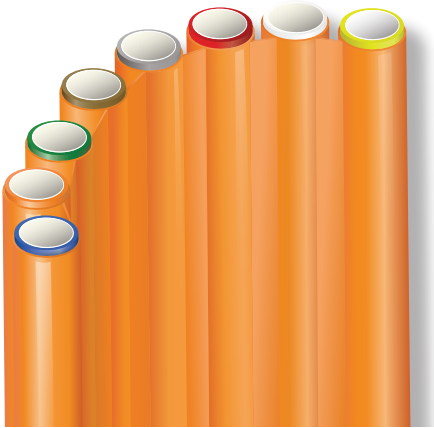

FUTUREPATH FLEX 8-WAY TECHNICAL SPECIFICATIONS

MICRODUCT SIZE (MM)	MICRODUCT MIN ID (MM/IN)	WIDTH (IN)	HEIGHT (IN)	OVER- SHEATH (IN)	WEB THICKNESS	WEIGHT (#/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS† (LBS)
12.7/10	9.8/0.39	5.09	0.57	0.035	0.02	0.48	6	11	2563

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength



+1 800 847 7661
WWW.DURALINE.COM

