


SMOOTH OUT/RIBBED IN

3" SDR 13.5

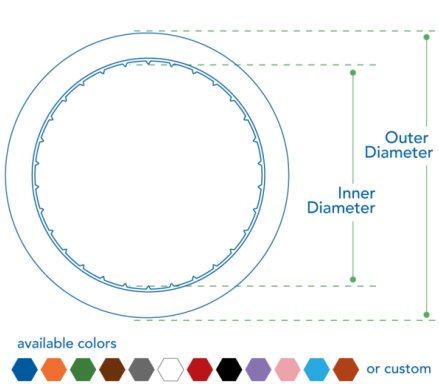

Nominal OD	3.5 in
OD Tolerance +/-	0.018 in
Min. Wall	0.259 in
Wall Tolerance +	0.031 in
Min. ID	2.88 in
Avg ID	2.911 in
Weight	1.171 lb/ft
Bend Radius Sup	39 in
Bend Radius UnSup	78 in
Conduit SWPS	6335 lbs

STANDARD DETAILS

DETAILS	Manufactured from flexible HDPE (High Density Polyethylene)
SPECIFICATIONS	All Smooth Out/Ribbed In conduit dimensions meet or exceed one or more of the following: ASTM F-2160, ASTM D-3350, ASTM D-3485, NEMA TC-7, UL 651A, UL 1990, Bellcore GR-356, CSA C22.2 No. 327-18
INSTALLATION TYPES	Plow, Trench, Directional Bore, Tray Installations, Aerial
COLORS	Blue, Orange, Green, Brown, Grey, White, Red, Black, Lilac, Pink, Aqua, Terra Cotta, Lime Green, or custom colors with optional stripes
CONDUIT MARKINGS	Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.

OPTIONS

CO-EXTRUDED LINING	SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions. Coefficient of friction for SILICORE ULF 0.07 versus non-lubricated HDPE conduit 0.18-0.22 (internal test method).
PRE-INSTALLED TAPE	Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.
PRE-INSTALLED CABLE	Cable can be factory pre-installed in conduit
UV PROTECTANT	Available for UV exposure applications (Aerial, Lashed, or External Tray)

REEL SPECIFICATIONS

REEL SIZE	STANDARD LENGTH	REEL TYPE
96 x 46 in	1000 ft	Steel
102 x 46 in	1250 ft	Steel
114 x 46 in	1500 ft	Steel

PRODUCT COMPLIANCE

We offer an extensive portfolio of US-made conduit products and accessories that conform with several domestic preference standards, including Buy America (BAA), Build America, Buy America (BABA), and DOT Buy American requirements. Any products including a locate wire or preinstalled cables, will need to be specifically evaluated. Fire Retardant Resins may also require additional evaluation to meet program guidelines. Please contact your Dura-Line representative for more information.

? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.



HDPE CONDUIT TECHNICAL DATA SHEET

SMOOTH OUT/RIBBED IN RECOMMENDED ACCESSORIES

3" SDR 13.5

3" SHUR-LOCK II		3" REDI-LOCK		ROTARY CONDUIT CUTTER 1.875" TO 4.500"	
Quantity: 6 / Per Case Packaging: Case Part Number: 20000173		Quantity: 6 / Per Case Packaging: Case Part Number: 20005479		Quantity: 1 Packaging: Each Part Number: 20001857	
3.00" SDR FLAT VINYL END CAP 3.500" OD		3.00" EXPANSION PLUG 2.920" - 3.450" ID		HYDRALUBE F200I SUMMER (4) 1 GALLON	
Quantity: 1 Packaging: Each Part Number: 20001817		Quantity: 30 / Per Case Packaging: Each Part Number: 20001764		Quantity: 30 / Per Pallet Packaging: (4) 1 Gallon Part Number: 20000218	
HYDRALUBE F300I SUMMER 5 GALLON PAIL		LUBADUK SUMMER (6) 1 GALLON		POLYESTER TAPE WP12 3000FT	
Quantity: 24 / Per Pallet Packaging: 5 Gallon Drum Part Number: 20000005		Quantity: 18 / Per Pallet Packaging: (6) 1 Gallon Part Number: 20000351		Quantity: 48 Packaging: 45" x 45" Part Number: 20000052	
POLYESTER TAPE WP18 3000FT		POLYESTER TAPE WP25 3000FT		LOCATABLE TAPE WP12LC 3000FT	
Quantity: 36 Packaging: 45" x 45" Part Number: 20000068		Quantity: 36 Packaging: 45" x 45" Part Number: 20000077		Quantity: 36 Packaging: 45" x 45" Part Number: 20000059	
LOCATABLE TAPE WP18LC 3000FT		LOCATABLE TAPE WP25LC 3000FT		ARAMID TAPE WK25 1000FT	
Quantity: 36 Packaging: 45" x 45" Part Number: 20000163		Quantity: 18 Packaging: 45" x 45" Part Number: 20000155		Quantity: 100 Packaging: 45" x 45" Part Number: 20000038	

? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.



+1 800 847 7661
WWW.DURALINE.COM



BULL-LINE BUCKET WP18 1300FT

BULL-LINE BUCKET WP25 750FT

Quantity: 36

Packaging: N/A

Part Number: 20095170



Quantity: 36

Packaging: N/A

Part Number: 20095171



? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.



+1 800 847 7661
WWW.DURALINE.COM

