


SMOOTH OUT/RIBBED IN

6" SDR 9

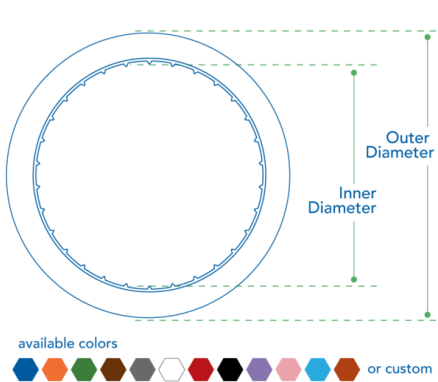

Nominal OD	6.625 in
OD Tolerance +/-	0.033 in
Min. Wall	0.736 in
Wall Tolerance +	0.088 in
Min. ID	4.937 in
Avg ID	5.025 in
Weight	5.926 lb/ft
Bend Radius Sup	73 in
Bend Radius UnSup	146 in
Conduit SWPS	32684 lbs

STANDARD DETAILS

DETAILS	Manufactured from flexible HDPE (High Density Polyethylene)
SPECIFICATIONS	All Smooth Out/Ribbed In conduit dimensions meet or exceed one or more of the following: ASTM F-2160, ASTM D-3350, ASTM D-3485, NEMA TC-7, UL 651A, UL 1990, Bellcore GR-356, CSA C22.2 No. 327-18
INSTALLATION TYPES	Plow, Trench, Directional Bore, Tray Installations, Aerial
COLORS	Blue, Orange, Green, Brown, Grey, White, Red, Black, Lilac, Pink, Aqua, Terra Cotta, Lime Green, or custom colors with optional stripes
CONDUIT MARKINGS	Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available.

OPTIONS

CO-EXTRUDED LINING	SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions. Coefficient of friction for SILICORE ULF 0.07 versus non-lubricated HDPE conduit 0.18-0.22 (internal test method).
PRE-INSTALLED TAPE	Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™ ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.
PRE-INSTALLED CABLE	Cable can be factory pre-installed in conduit up to 3"
UV PROTECTANT	Available for UV exposure applications (Aerial, Lashed, or External Tray)

REEL SPECIFICATIONS

REEL SIZE	STANDARD LENGTH	REEL TYPE
120 x 48 in	450 ft	Steel
-	20 ft	Stick
-	40 ft	Stick

PRODUCT COMPLIANCE

We offer an extensive portfolio of US-made conduit products and accessories that conform with several domestic preference standards, including Buy America (BAA), Build America, Buy America (BABA), and DOT Buy American requirements. Any products including a locate wire or preinstalled cables, will need to be specifically evaluated. Fire Retardant Resins may also require additional evaluation to meet program guidelines. Please contact your Dura-Line representative for more information.

? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.



HDPE CONDUIT TECHNICAL DATA SHEET

SMOOTH OUT/RIBBED IN RECOMMENDED ACCESSORIES

6" SDR 9

6" SHUR-LOCK II		6" REDI-LOCK		6.00" SDR E-LOC 6" LENGTH	
Quantity: 2 / Per Case Packaging: Case Part Number: 20000256		Quantity: 2 / Per Case Packaging: Case Part Number: 20005482		Quantity: 1 Packaging: Each Part Number: 20001503	
6.00" EXPANSION PLUG 5.975" - 6.375" ID		HYDRALUBE F200I SUMMER (4) 1 GALLON		HYDRALUBE F300I SUMMER 5 GALLON PAIL	
Quantity: 20 / Per Case Packaging: Each Part Number: 20001763		Quantity: 30 / Per Pallet Packaging: (4) 1 Gallon Part Number: 20000218		Quantity: 24 / Per Pallet Packaging: 5 Gallon Drum Part Number: 20000005	
LUBADUK SUMMER (6) 1 GALLON		POLYESTER TAPE WP12 3000FT		POLYESTER TAPE WP18 3000FT	
Quantity: 18 / Per Pallet Packaging: (6) 1 Gallon Part Number: 20000351		Quantity: 48 Packaging: 45" x 45" Part Number: 20000052		Quantity: 36 Packaging: 45" x 45" Part Number: 20000068	
POLYESTER TAPE WP25 3000FT		LOCATABLE TAPE WP12LC 3000FT		LOCATABLE TAPE WP18LC 3000FT	
Quantity: 36 Packaging: 45" x 45" Part Number: 20000077		Quantity: 36 Packaging: 45" x 45" Part Number: 20000059		Quantity: 36 Packaging: 45" x 45" Part Number: 20000163	
LOCATABLE TAPE WP25LC 3000FT		ARAMID TAPE WK25 1000FT		BULL-LINE BUCKET WP18 1300FT	
Quantity: 18 Packaging: 45" x 45" Part Number: 20000155		Quantity: 100 Packaging: 45" x 45" Part Number: 20000038		Quantity: 36 Packaging: N/A Part Number: 20095170	

? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.



+1 800 847 7661
WWW.DURALINE.COM



BULL-LINE BUCKET WP25 750FT

Quantity: 36

Packaging: N/A

Part Number: 20095171



? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.



+1 800 847 7661
WWW.DURALINE.COM

