
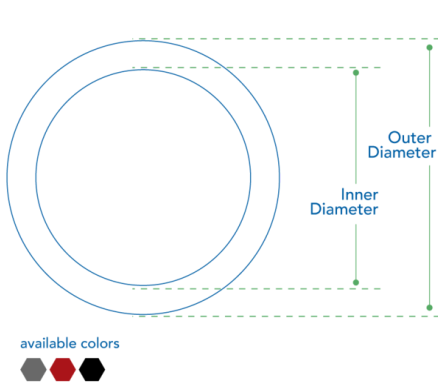


HDPE STICKS

3" SDR 9



| | |
|-------------------|-------------|
| Nominal OD | 3.5 in |
| OD Tolerance +/- | 0.018 in |
| Min. Wall | 0.389 in |
| Wall Tolerance + | 0.047 in |
| Min. ID | 2.628 in |
| Avg ID | 2.675 in |
| Weight | 1.648 lb/ft |
| Bend Radius Sup | 39 in |
| Bend Radius UnSup | 78 in |
| Conduit SWPS | 9122 lbs |

STANDARD DETAILS

| | |
|---------------------------|--|
| DETAILS | Manufactured from flexible HDPE (High Density Polyethylene) |
| SPECIFICATIONS | All HDPE Stick dimensions meet or exceed one or more of the following: ASTM F-2160, ASTM D-3350, ASTM D-3485, NEMA TC-7, UL 651A, UL 1990, Bellcore GR-356 |
| INSTALLATION TYPES | Trench, Directional Bore |
| COLORS | Grey, Red, Black |
| CONDUIT MARKINGS | Permanent marking along conduit includes: material, relevant standards, production info, and sequential feet or meter markings. Custom options available. |

OPTIONS

| | |
|---------------------------|--|
| CO-EXTRUDED LINING | SILICORE® ULF (Ultra-Low Friction) is co-extruded inside the HDPE wall creating a slick, permanent, interior lining. With a coefficient of friction 60% lower than standard HDPE conduit without the aid of wet lubricants, SILICORE® ULF exhibits no loss in performance over time or in extreme temperature conditions. Coefficient of friction for SILICORE ULF 0.07 versus non-lubricated HDPE conduit 0.18-0.22 (internal test method). |
| UV PROTECTANT | UV PROTECTANT available for above ground applications |

REEL SPECIFICATIONS

| REEL SIZE | STANDARD LENGTH | REEL TYPE |
|-----------|-----------------|-----------|
| - | 20 ft | Stick |
| - | 40 ft | Stick |
| - | 50 ft | Stick |

PRODUCT COMPLIANCE

We offer an extensive portfolio of US-made conduit products and accessories that conform with several domestic preference standards, including Buy America (BAA), Build America, Buy America (BABA), and DOT Buy American requirements. Any products including a locate wire or preinstalled cables, will need to be specifically evaluated. Fire Retardant Resins may also require additional evaluation to meet program guidelines. Please contact your Dura-Line representative for more information.



? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

HDPE STICKS RECOMMENDED ACCESSORIES

3" SDR 9

| 3" SHUR-LOCK II | | 3" REDI-LOCK | | ROTARY CONDUIT CUTTER 1.875" TO 4.500" | |
|--|--|---|---|---|---|
| <p>Quantity: 6 / Per Case</p> <p>Packaging: Case</p> <p>Part Number: 20000173</p> |  | <p>Quantity: 6 / Per Case</p> <p>Packaging: Case</p> <p>Part Number: 20005479</p> |  | <p>Quantity: 1</p> <p>Packaging: Each</p> <p>Part Number: 20001857</p> |  |
| 3.00" SDR FLAT VINYL END CAP 3.500" OD | | 3.00" EXPANSION PLUG 2.920" - 3.450" ID | | HYDRALUBE F200I SUMMER (4) 1 GALLON | |
| <p>Quantity: 1</p> <p>Packaging: Each</p> <p>Part Number: 20001817</p> |  | <p>Quantity: 30 / Per Case</p> <p>Packaging: Each</p> <p>Part Number: 20001764</p> |  | <p>Quantity: 30 / Per Pallet</p> <p>Packaging: (4) 1 Gallon</p> <p>Part Number: 20000218</p> |  |
| HYDRALUBE F300I SUMMER 5 GALLON PAIL | | LUBADUK SUMMER (6) 1 GALLON | | | |
| <p>Quantity: 24 / Per Pallet</p> <p>Packaging: 5 Gallon Drum</p> <p>Part Number: 20000005</p> |  | <p>Quantity: 18 / Per Pallet</p> <p>Packaging: (6) 1 Gallon</p> <p>Part Number: 20000351</p> |  | | |

? Safe working pull strength is calculated at 80% of tensile or breaking strength

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.