

SPECIALTY

CORRUGATED RISER

- Riser rated fire retardant corrugated duct
- Flexible, lightweight and easier to install than metal conduit
- Designed to protect existing cables and facilitate future cable installation or replacement
- When tested to UL2024/UL910, FIREJACKET® & DURATHANE® are low-smoke producing and fire resistant as defined by the National Fire Protection Association when rating cables as suitable for use in ducts, riser spaces


INSTALLATION TYPES

Interior Riser Applications

SIZE RANGE

1.0"
1.25"
1.5"

STANDARD COLORS

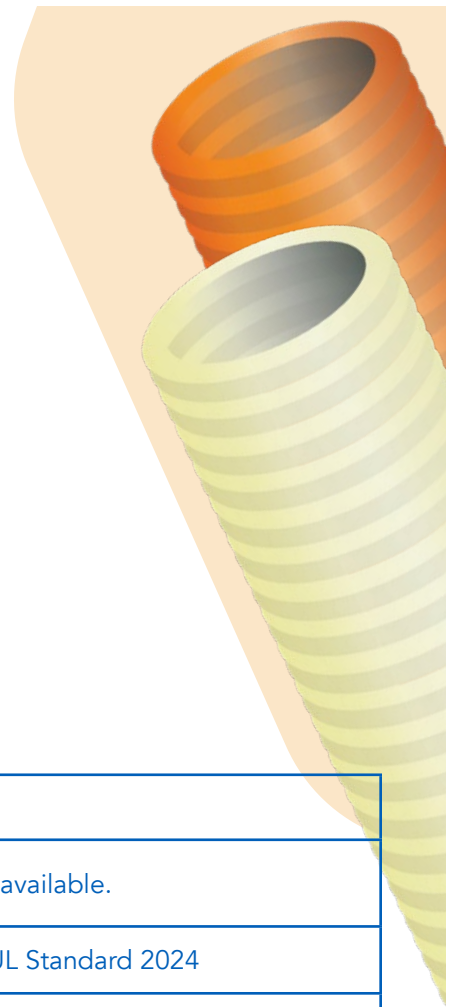

FEATURES

STANDARD

FOOTAGE MARKINGS Sequential foot or meter markings. Custom print streams available.

RISER UL Listed designed for riser applications per NEC articles 770 & 800 and UL Standard 2024

OPTIONS

PREINSTALLED TAPE Factory pre-installed Bull-Line™ Pull Tape with EVEN-LOAD™, ensures extra slack at any access point throughout the reel. Available 500lb–6,000lb tensile strength or locatable.

CORRUGATED RISER SPECS

SIZE	NOM OD TOL (IN)	AVG ID	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS†
1"	1.385±0.020	1.085	0.133	22	44	500
1.25"	1.570±0.020	1.200	0.135	22	44	500
1.5"	1.824±0.020	1.270	0.182	22	44	500

* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.

† Safe working pull strength is calculated at 80% of tensile or breaking strength



+1 800 847 7661
WWW.DURALINE.COM

