


**SPECIALTY**

# CORRUGATED RISER

- Riser rated fire retardant corrugated duct
- Flexible, lightweight and easier to install than metal conduit
- Designed to protect existing cables and facilitate future cable installation or replacement
- When tested to UL2024/UL910, FIREJACKET® & DURATHANE® are low-smoke producing and fire resistant as defined by the National Fire Protection Association when rating cables as suitable for use in ducts, riser spaces

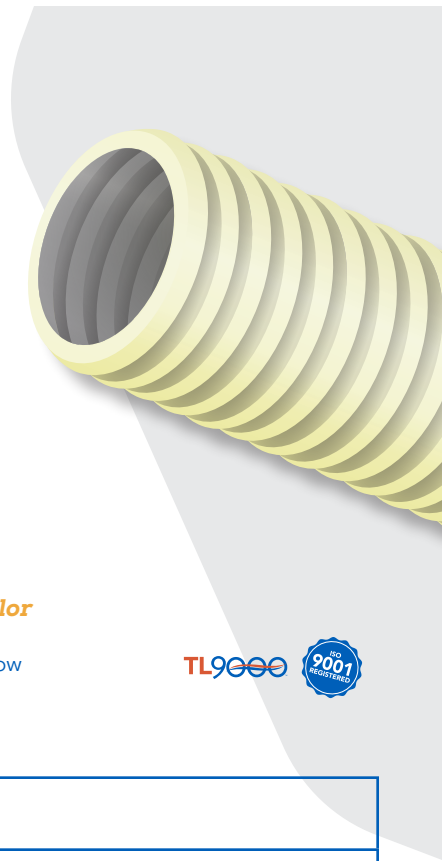

**installation types**

Interior Riser Applications

**size range available**

1.0"  
1.25"  
1.5"

**standard color**



dull yellow

TL9000



**FEATURES**

**STANDARD**

**FOOTAGE MARKINGS** Sequential foot or meter markings. Custom print streams available

**RISER** UL Listed designed for riser applications per NEC articles 770 & 800 and UL Standard 2024

**CORRUGATED RISER TECHNICAL SPECIFICATIONS**

SIZE	NOM OD TOL (IN)	AVG ID	WEIGHT (LB/FT)	BEND RADIUS SUP* (IN)	BEND RADIUS UNSUP* (IN)	SWPS†
1"	1.385±0.020	1.085	0.133	22	44	500
1.25"	1.570±0.020	1.200	0.135	22	44	500
1.5"	1.824±0.020	1.270	0.182	22	44	500

\* Unsupported Bend Radius guidelines should be followed during the installation process. The Supported Bend Radius are post-installation measurements.  
† Safe working pull strength is calculated at 80% of tensile or breaking strength



+1 800 847 7661  
WWW.DURALINE.COM

